上海腾鱼机械设备有限公司

SHANGHAI FLYING FISH MACHINERY MANUFACTURING CO.,LTD

地址: 上海市奉贤区奉城镇洪兰路376号6号
ADD: Building 3&6, NO.376, Honglan Road, Fengxian District, Shanghai

电话: 0086-21-37580234
Tel: 0086-21-37580234

传真: 0086-21-37587295
Fax: 0086-21-37587295

网址: www.chinalaundrymachine.com
Web: www.chinalaundrymachine.com

产品目录

上海腾鱼机械设备有限公司

SHANGHAI FLYING FISH MACHINERY MANUFACTURING CO.,LTD

CONTENTS
目 录

腾鱼洗衣 FLYING FISH LAUNDRY

唤醒你的生活 REFRESH YOUR LIFE!

洗衣机系列 Washing Machine Series 11

脱水机系列 Hydro Extractor Series 19

干衣机系列 Clothes Dryer Series 21

熨平机系列 Ironing Machine Series 23

折叠机系列 Folding Machine Series 26

送布机系列 Feeding Machine Series 29

展布机系列 Spreader Series 30

地毯清洗机系列 Carpet Washing Machine Series 31

干洗机系列 Dry Cleaning Machine Series 32

整烫系列 Finishing Products 36

洗衣房辅助设备 Laundry Auxiliary Equipment 42

上海腾鱼机械设备有限公司 02

荣誉证书
Certification

Verification of Compliance

Attestation of Compliance

Attestation of Compliance

国家轻工业服装洗涤机械质量监督检测中心
China National Light Industrial Apparel & Laundry Machinery Quality Supervision & Inspection Center
检测报告
TEST REPORT

MANAGEMENT SYSTEM CERTIFICATE
Shanghai Flying Fish Machinery Manufacturing Co., Ltd

营业执照

Supplier Assessment Certificate

CERTIFICATE
ATTESTATION
CERTIFICATE OF MACHINERY DIRECTIVE

SGS

CERTIFICATE OF REGISTRATION
Shanghai Flying Fish Machinery Manufacturing Co., Ltd

创建中国智慧型中央洗衣工厂

CPS intelligent management system (including process automation, internet of things, internet, visualization, erp, app system customization program);

CPS 智能管理系统(包括过程自动化，物联网，互联网，可视化，ERP，APP 系统定制方案)；精益流程规划设计，生产运营效率最大化(目标 PPOH ＞50Kg/hr. 人; 能耗＜1.0Kwh/kg); 清洁生产，环保节能，资源消耗最小化(直燃加热，能源系统优化，排放资源再利用)。

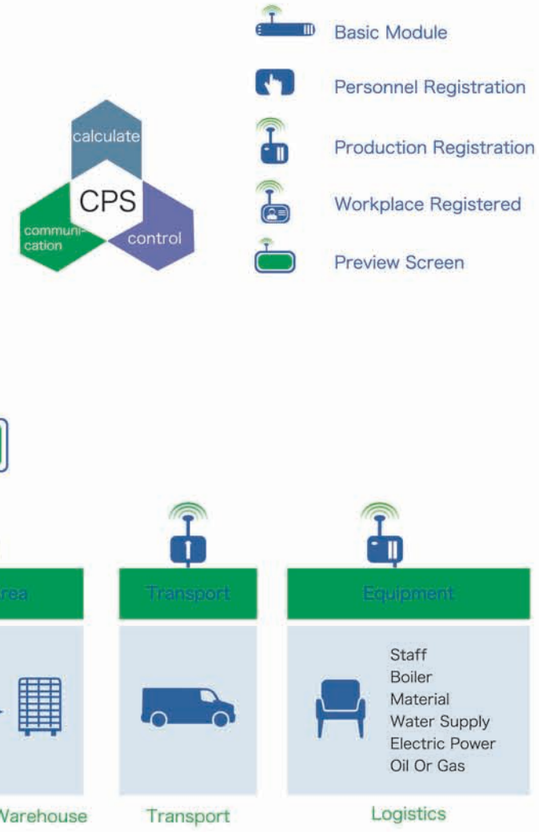

工程方案组成
Project composition

洗衣房工程主要内容
The main content of the laundry project

Automatic equipment systems

Automatic cleaning system (integrated system) --- washing dry ~ drying(or broken up); automatic hanging bag system (washed bag, ironing bag, etc.); automatic ironing (auto-matic washing system) Flat production line (ironing line) --- cloth (or send cloth) + ironing +folding+stacking; tunneling clothes drying system (drying dragon) --- drying+shaping+classification, etc.

Automatic logistics system

Multi-station automatic sorting station (ground type, bench type,floor type, etc.); automatic hanging bag system (washed bag, ironing bag, etc.); automatic transfer system(track type, conveyor belt type, lift type, etc.) Storage and transportation systems.

Automatic control and information management system

Equipment automation centralized control system; operational process intelligent information management system.

Media Resource Optimization System

Pre-media use program (steam or no steam heat source configuration,hot water program, etc.)Post-level resource media processing and reuse(Waste heat, waste gas, waste water, waste steam, etc.);Other media configuration (chemical,softened water, airflow, etc.).

Production process planning and services

Based on lean management process planning and design; flat and three-dimensional program layout design;investment and operational indicators accounting feasibility analysis;pre-sale, sale,after-sale,and engineering transformation of the integrated engineer-ing services program.

自动化设备系统

隧道式批量洗涤系统(洗衣龙)--- 洗涤 + 脱干 + 烘干(或打散)；自动集成洗涤系统(集成系统)--- 洗涤脱干 + 烘干(或打散)；自动熨平生产线(熨平线)--- 振布(或送布)+ 熨平 + 折叠 + 堆码；隧道式工服烘干系统(烘干龙)--- 烘干 + 整形 + 分类等

自动物流传送系统

多工位自动分拣台(地面型，台架型，楼层型等)；自动吊袋系统(水洗吊袋，熨烫吊袋等)；自动传送系统(轨道车型，传送带型，升降型等)；储存及运输系统等

自动控制和信息管理系统

设备自动化集中控制系统；运营过程智能信息管理系统等

介质资源优化系统

前级介质使用方案(蒸汽或无蒸汽热源配置，热水方案等)；后级资源介质处理和再利用方案(废热，废气，废水，废汽等)；其它介质配置方案(化料，软化水，气流等)

生产流程规划及服务

基于精益管理的流程规划设计；平面和立体方案布置设计；投资及运营指标核算可行性分析；售前、售中、售后、维保及工程改造的一体化工程服务方案等

系统组成
System composition

Washing And Drying Automation
Tunnel type washing machine.
Automatic integrated washing system.

Post-finishing Automation
Linen ironing line.
Work clothes finishing line.

Logistics Delivery Automation
Sorting system.
Transport and storage systems.

Automation And Intelligence
Automatic Control System.
Intelligent management system.

Media Resource Optimization
Clean energy systems.
Resource reuse system.

洗涤烘干自动化
隧道式洗涤机组
自动集成洗涤系统
后整理自动化
布草熨烫线
工服整理线
物流传送自动化

分拣系统
输送和储存系统
自动化及智能化
自动控制系统
智能管理系统
介质资源优化
清洁能源系统
资源再利用系统

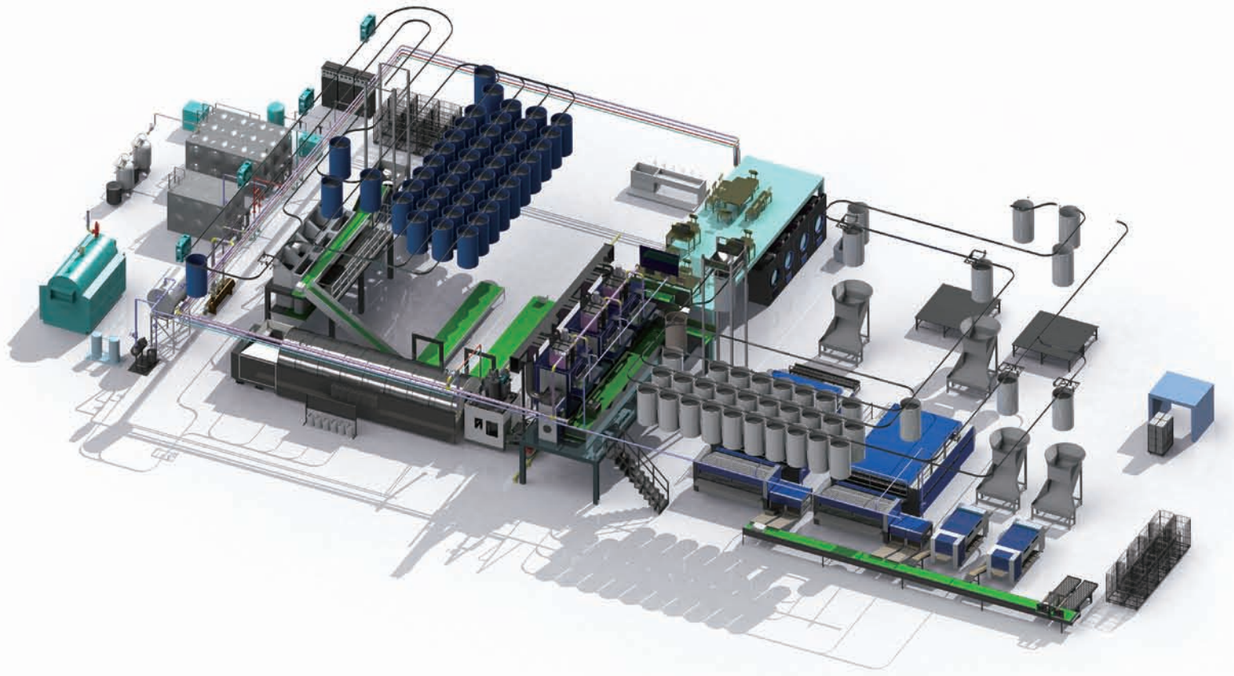

洗衣龙系统
Tunnel Washing System

全球首创 自动化柔性洗涤系统
THE FIRST INTEGRATED CAR DESIGH IN THE WORL .D

More Flexible And Flexible:
Each module independent frequency control (7-15rpm), the washing process can be adjusted according to the fabric motor, maintenance and expansion of production capacity is convenient;
Higher Degree Of Cleanliness:
360 degree round wash and take into account the 270 degree shaking washing mode, erosion and compression of the two-way role, pre-wash pump cycle, 40: 1 large load ratio, higher degree of washing;
More Flexible:
Soft connection outer cylinder, multi-stage circulating pump (first class high-pressure pump scouring), than other tunnel washing machine to save resources more than 30%.

更机动灵活：
每个模块独立变频控制（7-15rpm），洗涤工艺可根据织物机动调整，维修和扩展产能方便；
更高洗净度：
360度圆周洗涤并兼顾270度晃动洗涤方式，冲刷和压缩双向作用，预洗泵循环，40:1大载荷比，洗净度更高；
更节省能源：
软性连接外筒，多级循环泵（首舱高压泵冲刷），比其他洗衣龙节省资源消耗30%以上。

创新 Innovation

- 预洗高压泵循环冲刷；
- 独立模块速度变频可调（7-15rpm）；
- 兼顾圆周和晃动两种洗涤方式；
- 43:1超大载荷比，0.3G超高洗净能力；
- 数据系统自动计量，系统智能匹配和控制各个环节。

- Pre-wash high-pressure pump cycle erosionn;
- Independent module speed adjustable frequency (7-1 5rpm);
- Both the circumference and shaking two washing methods;
- 43: 1 large load ratio, 0.3G ultra-high cleaning capacity;
- Data system automatic measurement, the system intelligent matching and control of all aspects.

Each cabin speed can be motorized frequency control 11-18rpm, in the balance on the basis of the beat to achieve a different washing effect

每一舱速度均可机动变频调速11-18rpm，在均衡节拍的基础上

tunnel washing machine batch processing capacity; similar to the use of mobile alone; more than a single machine cleaning power

洗衣龙的批量处理能力；类似单机的使用机动性；

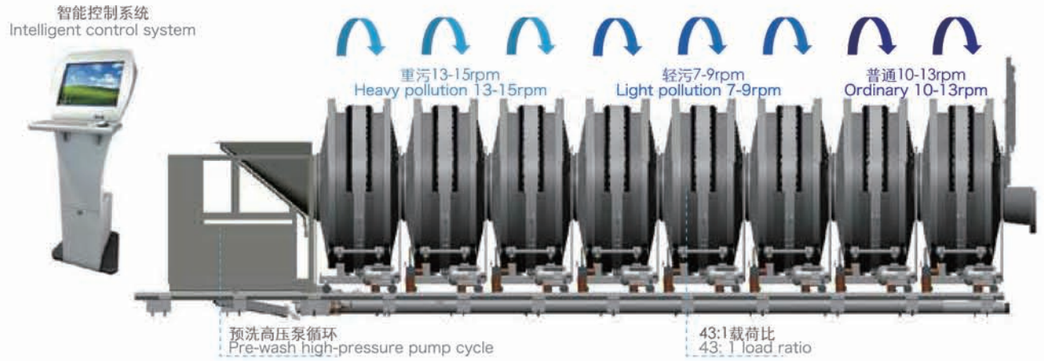

The overall design, motor car modeling, will be scattered piping, water tank, liquid level box, filter box, electric control box integrated in the machine
整体外观设计，动车造型，将分散的管路、水箱、液位箱，过滤箱，电控箱集成在机内

All stainless steel closed structure to reduce noise and dust pollution Watch the window for easy routine monitoring Loose -sheet folding door, quick repair and maintenance Isolate gates to reduce cross and environmental pollution Independent variable frequency drive, to adapt to different grass, easy to adjust Internal hidden piping system, the appearance of more clean
全不锈钢封闭结构，减少噪音和粉尘污染观察视窗，方便日常监控活页式折叠门，快速检修和维护隔离闸门，减少交叉和环境污染独立变频驱动，适应不同布草，调整方便内部隐藏管路系统，外观更整洁

Increase the volume of the liner, the load from 35: 1 to 40: 1, enhance the cleaningforce Built-in liquid level box, the appearance of more clean, beautiful Water pump on both sides of the layout, increase the location of the box, the structure is more compact, more convenient maintenance All structural parts are stainless steel, fine molding process Increase the pre-wash pump cycle piping and water, high-speed water erosion, improve pre-wash effect Automatically open the cylinder to facilitate maintenance of mobile modules Increase the tank volume of 38%, to ensure adequate washing process water supply
增加内胆容积，载荷从35:1提升至40:1，增强洗净力内藏式液位箱，外观更整洁、美观水泵两侧布置，增加电箱位置，结构更紧凑，维修更方便所有结构件均为不锈钢材质，精细的模压化加工增加预洗泵循环管路和水路，高速水流冲刷，提高预洗效果增加水箱容积38%，保证洗涤过程足够的用水流量供给自动打开气缸，方便维修移动模块



Original design of the washing function, taking into account the two washing methods, to adapt to different textile washing process requirements.360 degree round washing method,270 degrees shaking washing method.
独创设计的洗涤功能，兼顾两种洗涤方式，适应不同纺织品洗涤工艺的要求。360度圆周洗涤方式，270度晃动洗涤方式。

像单机一样任意调整洗涤程序
实现完美的洗净效果

医疗布草程序：
7舱75KG，出料节拍3分钟（180秒），1500kg/hr

洗后检测数据：
活性碱小于：20PPM，PH值：6.5-6.9，返洗率1.1%-1.3%

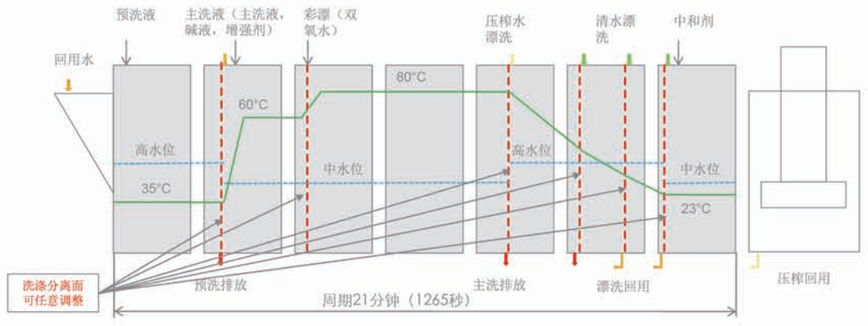

直径 (mm)	洗涤角度	提升高度 (mm)	容积载荷比 (容积/载荷)	径深比 (直径/深度)	最小洗涤机械力 (G因子)	最大洗涤机械力 (G因子)	效果
2010	360°	1800	43:1	2.83	0.12	0.36（18rpm）	更大的机械作用力

超强的洗净力和机动性
可柔性、智能处理不同的织物

红外检测技术，智能控制烘干过程；
双变频控制，回风加热烘干系统，高效节能（含直燃型）
高压油泵，压榨过程根据植物类别往复缓存可调。
监控洗涤过程及结果参数，智能检测和判断洗涤效果（PH，电解度）。
独立模组，360度洗涤和270度洗涤兼顾，各仓均可变频柔性调整洗涤速度和工艺参数，适应不同布草的处理要求。
洗涤机械力最高可达0.36G（比普通龙高一倍），轻松处理各类疑难布草。

创新研发的经济型洗衣龙 更加适合中国使用环境

- 对升级改造资金困难的客户，可采用经济型洗衣龙配置，并保持隔离洗涤方式；
- 洗涤量800-1200公斤/小时（相当于10台单机能力），厂房约1000平方米；
- 一体式结构，模块化批量生产，大幅降低设备生产和采购成本。
- 更好的性价比配置，具有同时与单机，集成，洗衣龙系统竞争的能力。

处理能力计算比较（更少的舱数达到同样的处理量）

计算公式：处理能力= 总载荷 / 洗涤周期 *60

类别	每舱载荷（kg）	洗涤周期（min）（实际/理论）	舱数（节）	出科节拍（min）	处理能力（kg/hr）
柔性龙	75	20（17）	6	3.50	1350(1588)
柔性龙	75	20（17）	7	3.00	1575(1853)
柔性龙	75	20（17）	8	2.63	1800(2218)

核心优势

项目	圆周龙竞争优势（相对于其他洗衣龙）	要点分析
性能优势	360度洗涤，机械力大，洗净度更高	解决了普通龙洗不干净，不能混洗维修和扩展比较困难的难题
	全双仓变频已调整，洗涤适应性和机动性更强，可以混洗	
	组合模块结构，使用维护方便，可扩展产能	相对于普通龙更加节省资源消耗降低运营成本
经济优势	耗水量比其他系统少50%	
	耗蒸汽量比其他系统少20%	
	化学品消耗比其他系统少30%	相对于模块龙
改进优势	分仓变频控制，兼顾晃动洗涤方式，可针对不同织物调整洗涤转速和各类参数，实现柔性洗涤	
	预洗泵循环功能，提高预洗处理效果；	
	容积载荷比高达40:1，充分的洗涤空间，增大洗净力；	
	整体不锈钢圆顶外观，防护和防尘能力强，更加紧凑和美观；	
	基于WIN7的控制操作系统，具有远程操控和数据管理功能。	

倾斜式重磅洗脱机
AUTOMATIC HEAVY WASHER EXTRACTOR

1.The computer control system can realize the main programs of automatic water addition, pre-washing, main washing, rinsing, neutralization, etc. There are 30 sets of washing programs to choose from, and there are 5 sets of common automatic washing programs.
2.Convenient loading and unloading, 25 degrees backward when feeding, suitable for automatic loading operation. When the material is discharged, it is automatically tilted forward by 21 degrees, the speed of the material is fast, and the labor intensity is reduced.
3.Unique lower suspension shock absorption design, shock absorption rate can reach 98%, ultra-low vibration, improve the stability of the equipment in high-speed operation.
4.The high-quality frequency converter guarantees the minimum speed and the maximum speed, which not only ensures the washing quality, but also improves the dehydration rate.
5.The use of high-quality bearing oil seals can withstand high-strength bearing seat design, ensuring the normal use of the equipment under heavy load conditions.
6.Large-diameter stainless steel clothes door design and automatic door control device not only improve the safety in use, but also meet the needs of loading more linen.
7.Due to the severe use conditions such as strong acid, strong alkali, high temperature during washing, special anti-corrosion treatment of zinc spray is applied to all places in contact with water, which ensures the durability of the machine and the safety of linen.
8.The design of large-diameter water inlet, automatic feeding system, and optional double drainage can help you shorten the washing time, increase efficiency, and reduce costs.

1. 电脑控制系统，可实现自动加水、预洗、主洗、漂洗、中和等主要程序，内储 30 套洗涤程序可供选择，并备有 5 套常用自动洗涤程序。
2. 装卸方便，进料时后倾 25 度，适合装料自动化作业。出料时自动前倾 21 度，出料速度快，减轻劳动强度。
3. 独特的下悬浮减震设计，减震率可达 98%，超低震动，提高了设备高速运转中的稳定性。
4. 高品质的变频器，保证了最低转速和最高转速，既保证了洗涤质量，又提高了脱水率。
5. 采用高品质轴承油封，能承受高强度的轴承座设计，保证了设备在大负荷工况条件下的正常使用。
6. 大口径不锈钢装衣门设计，自动门控装置，既提高了使用中的安全性，又满足了装载更多布草的需求。
7. 因洗涤中的强酸、强碱、高温等恶劣使用状况，凡接触水处都采用特殊喷锌防腐处理，保证了机器耐用性和布草的安全性。
8. 大口径的进水口、自动加料系统、可供选择的双排水等设计，帮您缩短了洗涤时间，提高了效率，降低了成本。

规格型号 Model & norm	SXT-A-1300FZQ
工作电压（V） Washing voltage	380
洗涤容量（kg） Washing capacity	130
滚筒容积（L） Revolver capacity	1300
洗涤速度（rpm） Washer speed	32
均布速度（rpm） Cloth rotary speed	64
中脱速度（rpm） Medium spin drying rotary speed	335
高脱速度（rpm） High spin drying rotary speed	650
脱水力（G） Take off the hydraulic	300
取衣倾斜角度（°） Take the angle	18
主电机功率(kw) Main Motor power	15
顶升电机功率（kw） Top of motorpower	2.2
蒸汽压力(MPa) Steam pressure	0.4-0.6
自来水压力（Mpa） Water supply pressure	0.2-0.3

规格型号 Model & norm		
	压缩空气工作压力（Mpa） Compressed air pressure	0.5-0.7
	噪声(db) Noise	≤75
	蒸汽管道通径（DN） Steam pipe diameter	25
	进水管通径（DN） Inhalant siphon diameter	50
	排水管外径（mm） Outlet drainage diameter	140
	压缩空气接管通径（mm） Compressed air inlet diameter	6
洗涤周期	耗水量(kg) Waterconsumption	2100
	耗电量(kw) Cycleelectric consumption	7
	耗蒸汽量(kg) Steamconsumption	60
	配备压缩空气流量（㎥/min） Air compressor capacity	0.1
	电源线三相四线制（㎟） Power supply:3p＆4-wires	16
	整机重量(kg) Overall weight	4850
	外形尺寸(mm) Exterior dimension	2300×2330×2410

集成倾斜式洗脱机
UTOMATIC DOUBLE SIDES TILTING WASHING

1.Adopt "fast washing" design concept to reduce non-effective running time and shorten washing cycle.
2.Optimized design, greatly reducing resource consumption; the standard configuration is double inlet and double drainage system, if combined with external water circulation system, it can save 40% water.
3.The high-speed drying factor reaches the limit of 350G, which reduces the moisture content of linen by 12% (8%).
4.The shock absorption structure of the national invention patent, the shock absorption rate is as high as 97%; the finite element design, the German higher standard fatigue verification, and the continuous reliability of the structural parts for more than 8 years.
5.Professional ergonomic design, beautiful appearance, compact structure, reducing area by 15%.
6.High anti-corrosion performance, all parts in contact with water are made of stainless steel, and the liquid soap box is made of stainless steel.
7.Patented door and seal design, to prevent linen damage and slippage, large window and door body, easy to operate.
8.7-inch color touch screen computer controller, easy operation and management (picture display, permission control, U disk and network connection, Microsoft CE operating system, upgrade interface).

1. 采用"快速洗涤"的设计理念，减少非有效运行时间，缩短洗涤周期。
2. 优化设计，极大地减少了资源消耗；标配为双进水和双排水系统，如果与外配的水循环系统结合使用可以再节水 40%。
3. 高速脱干因子高达 350G 的极限，降低了布草含水率 12%（8 个百分点）。
4. 国家发明专利的减震结构，减震率高达 97% 以上；有限元设计，德国更高标准的疲劳验证，结构件持续可靠性 8 年以上。
5. 人机工程专业设计，造型美观，结构紧凑，减少占地面积 15%。
6. 高防腐性能，与水接触部分均采用不锈钢材质，皂液箱体采用不锈钢材质。
7. 专利门和密封设计，杜绝了布草损伤和滑漏，超大视窗和门体，轻松操作。
8.7 寸彩色触摸屏电脑控制器，操作和管理方便（图画显示，权限控制，U 盘和网络连接，微软 CE 操作系统，升级接口）。

规格型号 Model & norm	SXT-1300FQB
工作电压（V/P/HZ） Washing voltage	380/3/50
洗涤容量（kg） Washing capacity	110~130
滚筒容积（L） Revolver capacity	1300
洗涤速度（rpm） Washer speed	32
均布速度（rpm） Cloth rotary speed	78
中脱速度（rpm）（mm） Medium spin drying rotary speed	325
高脱速度（rpm） High spin drying rotary speed	650
传动功率(kw) Motor power	15

顶升电加功率（kw） Top of the motor power	2.2
前倾角度（°） Leaning Angle	18
后倾角度（°） Rake Angle	19
蒸汽压力(MPa) Steam pressure	0.4~0.6
给水压力(MPa) Feed water pressure	0.2~0.3
压缩空气压力(MPa) The compressed air pressure	0.5-0.7
整机重量(kg) Overall weight	5150
外形尺寸(mm) Exterior dimension	2552×2277×3950

GL系列隔离洗衣机
GL Series Barrier Washing Machine

1.With the isolating type and isolating wall,divides the room into two separate areas, meets the requirement of gem-free, dust-free, anti-static washing needs.
2.The panel, cylinder,drum are all high quality stainless steel, long life.
1. 隔离式与隔离墙将房间分裂成两个独立区域，满足使用要求无菌、无尘、防静电洗涤的需要。
2. 面板、缸体、滚筒都是优质不锈钢材料制成，使用寿命长。

Model型号		GL30	GL50	GL100
Washing Capacity容量	kg	30	50	100
Motor Power电机功率	kw	4	5.5	7.5
Drum Dimension滚筒尺寸	mm	Φ800x1030	Φ880x1 050	Φ950x1450
Cold water Inlet冷水管	inch	1	1	1
Dimension尺寸	mm	1320x1100x1820	1720x1100x1820	1850x1330x2200
Net Weight重量	kg	1570	1750	2500

SXT系列倾斜式洗衣机
SXT SERIES TILT WASHING MACHINE

1.The whole unit is combined inner drums, outer drums, rotatable lifting bearing system, shock absorbing spring, shock reducer and lifting cylinder and so on.
2.For high extraction, there are four speeds depending on different materials. The speed regulating system is controlled by LS inverter, washing speed and extracting can raise promptly, protect the garments and other cloth.
3.High quality stainless steel is for anti-rust and long-term service.
1. 整机是由内滚筒、外滚筒、可升降轴承系统、弹簧减震器、减震器和气囊等组成。
2. 高脱过程，根据不同的织物面料有四个速度可选。通过变频器来控制转速，洗涤到高脱平稳过渡，保护各种服装和其他织物。
3. 优质不锈钢，防锈效果好，使用寿命长。



Model型号		SXT-130F	SXT-150F
Rated Capacity额定容量	kg	130	150
Drum Dimension滚筒容积	mm	φ1300*985	∅1470*880
Door Size 门尺寸	mm	Ø 720 or Ø 800	∅720 or ∅800
Motor Power电机功率	kw	11, 1440r/min	18.5, 1440r/min
Washing speed洗涤速度	r/min	32	38
Extracting speed脱水速度	r/min	650	48~580
Inverter Power变频器功率	kw	15	20
Inlet of Water进水管尺寸	inch	φ50	3
Inlet of Chemical洗涤化料尺寸	inch	3/4	1
Inlet of Steam蒸汽管尺寸	inch	1	1 1/2
Steam Pressure蒸汽压力	Mpa	0.4-0.6	0.4-0.6
Water Pressure水压力	Mpa	0.2-0.3	0.2-0.3
Drain Pipe排水管尺寸	mm	φ114*2	150
Water consumption耗水量	l/kg	< =25	<=25
Dimension外型尺寸	mm	1810*2520*2180	2500x2280x2280
Weight重量	kg	4500	5000

XGQ系列变频全自动洗脱机
XGQ SERIES AUTOMATIC WASHING MACHINE, WASHER EXTRACTOR

序号	型号 model	单位	XGQ-10F	XGQ-12F	XGQ-15F	XGQ-20F	XGQ-25F	XGQ-30F	XGQ-50F	XGQ-100F	XGQ-130F
1	洗涤容量 capacity	KG	10	12	15	20	25	30	50	100	130
2	滚筒尺寸 Drum Dimension	mm	φ580*300	φ580*450	φ700*400	φ700*520	φ800*500	φ800*580	φ1020*610	φ1200*870	φ1300*985
3	洗涤转速 Drum Speed(wash)	R.pm	65	65	58	48	48	36	36	32	32
4	高脱转速 Drum Speed(hi-extract)	R.pm	500	500	750	700	650	700	700	670	650
5	电机功率 Motor Power	Kw	1.5	1.5	2.2	2.2	2.2	3	5.5	7.5	11
6	变频器功率 Inverter power	Kw	1.5	1.5	2.2	2.2	3.7	3.7	7.5	11	15
7	电加热功率 Electric heating power	Kw	6	6	10	12	15	24	30	48	
8	冷/热水管 Cold / hot water pipe	mm	φ20	φ20	φ20	φ20	φ20	φ32	φ40	φ50	φ50
9	排水管 Drainpipe	mm	φ60	φ60	φ60	φ60	φ60	φ76	φ114	φ114*2	φ114*2
10	水耗量 Water consumption	kg	130	168	210	300	387	473	758	1181	1350
11	蒸汽管尺寸 Steam pipe	mm	φ15	φ15	φ15	φ15	φ15	φ15	φ32	φ32	φ32
12	蒸汽压力 steam pressure	Mpa	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.6
13	进水压力 Inlet pressure	Mpa	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3	0.2~0.3
14	外形尺寸 Dimensions	mm	800*820*1130	800*920*1240	950*1040*1560	950*1200*1560	1090*1170*1580	1420*1450*1800	1480*1650*1860	1780*2150*2060	1800*2350*2120
15	整机重量 Weight	KG	300	350	580	680	960	1500	2500	3200	4000

1.Fully automatic, microcomputer-controller, 5 standard programs, with 30 additional adjustable programs, flexible for set.
2.High quality stainless steel,good appearance, long life.
3.Full suspension shock structure,low shake,low noise, combination of shock absorbers and springs for maximum absorption,need no excessive foundations.
4.Operater can flexible choose. Electric, Steam or Hot water as heat source.
5.Imported bearing,precise and durable.
6.Fixed screws support for long-distance transportation, avoid shaking damage during transit.
7.High quality inverter system,easily realize washing and extracting frequency stepless adjusting.
8.Multiple sealing system, oil sealing,water sealing, stainless steel sealing.
9.External lubrication oil cup, easy to maintenance.
10.Safety door interlock system, reduce fatigue, missue and the risk.

1. 全自动电脑板，标配有 5 个标准洗涤程序，另外还附有 30 个可调节程序，方便灵活设置。
2. 优质不锈钢材质，外观精美，使用寿命长。
3. 采用全悬浮结减震结构，低震动，低噪音，减震器和高强度弹簧组合结构能有效化解机器的震动，提高机器运行的稳定性，不需要额外的地脚。
4. 有电加热、蒸汽加热、直接使用热水等方式可供使用单位选择，灵活方便。
5. 进口密封系统，密封效果好，使用寿命长。
6. 固定支架系统可以保证运输过程中的安全，避免颠簸对机器产生损坏。
7. 优质变频系统，实现了从低速洗涤、均布、高脱的平稳过渡。
8. 严密的密封系统，油封密封、水密封、不锈钢密封多层保护。
9. 外置油杯系统，操作简单，维修、保养方便。
10. 装衣门配有安全门锁和控制联动装置，减少危险，保护操作人员安全。

XGP-L系列水洗机
XGP-L SERIES INDUSTRIAL WASHING MACHINE

Model型号		XGP-15L	XGP-25L	XGP-35L	XGP-50L	XGP-70L	XGP-100L
Capacity容量	kg	15	25	35	50	70	100
Drum Diameter滚筒直径	mm	750	980	980	980	980	1200
Drum Depth滚筒深度	mm	380	395	495	666	950	850
Drum volume滚筒容积	l	168	298	373	502	716	961
Inlet Water Pipe进水管	inch	1	1.5	1.5	1.5	2	2
Out Water Pipe出水管	inch	2	2	2	2	2	3
Motor Power电机功率	kw	1.1	1.1	1.5	1.5	2.2	3
Voltage电压	V	220/240/380/415/440					
Dimension外形尺寸	L(mm)	900	1200	1200	1200	1200	1400
	W(mm)	900	1100	1150	1450	1650	1600
	H(mm)	1420	1630	1630	1630	1630	1850
Weight重量	kg	300	420	480	530	600	1000

XGP-H系列水洗机
XGP-H SERIES INDUSTRIAL WASHING MACHINE

1.It is driven by triangle belt which is durable and moves smooth with low shock.
2.The drum and panel are in stainless steel,smooth surface, good appearance, long life, there are safety lock on both inner drum and outer drum.
3.Suitable for laundry, hostel, troop, hospital, hotel, blanching & dyeing factory, large & middle size enterprise
1. 三角皮带驱动，经久耐用，平稳且噪音小。
2. 滚筒和外观由不锈钢制成，表面光滑、外形美观、使用寿命长，滚筒的内外都有安全锁。
3. 适用于洗衣房、招待所、部队、医院、宾馆、漂染工厂，大型和中型企业。

The machine adopts horizontal and drum-type structure, low noise, low shock, it can wash, can't extract, operate & maintain easily and flexibly.
本机器采用卧式和鼓室结构、低噪音、低震动，可以洗涤，不能脱水，并且操作和维护简单灵活。

Model型号		XGP-30H	XGP-50H	XGP-100H	XGP-150H	XGP-200H	XGP-250H	XGP-300H	XGP-500H
Capacity容量	kg	30	50	100	150	200	250	300	500
Drum Diameter滚筒直径	mm	660	850	990	1100	1210	1210	1320	1620
Drum Depth滚筒深度	mm	1000	1000	1420	1800	2000	2200	2200	2730
Drum volume滚筒容积	l	342	567	1093	1710	2299	2528	3009	4741
Inlet Steam Pipe进气管	inch	0.75	1	1	1.5	1.5	1.5	1.5	0.8
Steam Pressure蒸汽压力	mpa	0.3-0.6	0.3-0.6	0.3-0.6	0.3-0.6	0.3-0.6	0.3-0.6	0.3-0.6	0.3-0.6
Motor Power电机功率	kw	1.5	2.2	4	4	5.5	7.5	11	15
Voltage电压	V	220/240/380/415/440							
Dimension外形尺寸	L(mm)	1860	1880	2260	2820	3050	3250	3250	5400
	W(mm)	1160	1300	1500	1700	1900	1900	1900	2450
	H(mm)	1290	1510	1720	1900	1900	1600	2050	2900
Weight重量	kg	387	510	912	1900	2200	2500	2700	3320

TL系列脱水机
TL Series Hydro Extractor

1.Cover and inverter is optional.
2.The panel and drum are all in stainless steel, good appearance and long life.
3.It was assembled with unique shock-absorber,three legs suspended structure, reasonable structure,running stable, low noise.
4.The brake system adopts feet braking ,smooth braking, easy and flexible to operate.
1. 盖子和变频器是可选项。
2. 表面和滚筒都是不锈钢、质量好、使用寿命长。
3. 这是具有独特的避震装置，三足悬挂结构，结构合理、运行稳定、噪声低。
4. 制动系统采用脚刹车，制动平稳，操作简便灵活。

Model型号		TL-15	TL-25	TL-50	TL-70	TL-100	TL-150
Capacity容量	kg	15	25	50	70	100	150
Drum Diameter滚筒直径	mm	Φ440x370	Φ570x310	Φ850x370	Φ950x400	Φ1000x400	Φ1500x400
High spin Speed高脱速度	r/min		850	786	780	770	700
Voltage电压	V	220/240/380/415/440					
Motor Power电机功率	kw	1.5	1.1	4	5.5	7.5	11
Dimension外型尺寸	L(mm)	800	860	1100	1350	1500	1950
	W(mm)	800	1000	1150	1450	1600	1950
	H(mm)	780	660	850	900	900	1000
Net Weight重量	kg	125	350	900	1000	1200	2400

SWD&SDD 系列堆放式洗衣房设备
SWD&SDD Series stack laundry equipment

1.Double-layer structure, saves space.
2.Panel and drum adopt high quality stainless steel, acid and alkali resistance, anti-corrosion, good appearance, long life.
3.With mechanical suspension shock structure, low noise, free standing.
4.Simple door system, easily for users.
5.Can read different coins and tokens at the same time, card read system also available, widely used for all over the world.
6.Door lock system of washer and dryer can protect users.
7.It can work smoothly even high spin speed more than 700r/min because of unique suspension system.
1. 采用双层结构，更大可能的节省空间。
2. 面板和滚筒均采用优质不锈钢，耐酸碱，抗腐蚀，美观大方，经久耐用。
3. 采用悬浮防震结构，噪音小。能够独立站立。
4. 简单的门锁系统，使用户能够轻松使用。
5. 投币器可以同时读取不同的硬币和代币，也可以刷卡，广泛用于世界各地。
6. 洗衣机和烘干机的门锁系统，可以更好的保护用户。
7. 拥有独特的悬浮系统，可使高脱转速达到 700R/min. 使机器能够更好的工作。

序号	型号 model	单位	SWD-10/12	SWD-12/15	SWD-15/15	SWD-20/20
1	洗涤容量 Washing capacity	KG	10	12	15	20
2	烘干容量 Drying capacity	KG	12	15	15	20
3	洗脱机滚筒尺寸 washer drum dimension	mm	φ670*300	φ670*340	φ670*430	φ670*520
4	洗脱机滚筒容积 washer drum volume	L	92	119	152	200
5	洗脱机电机功率 washer Motor power	Kw	1.5	1.5	1.5	2.2
6	变频器功率 Inverter power	Kw	1.5	1.5	1.5	2.2
7	烘干机滚筒尺寸 dryer drum dimension	mm	φ700*480	φ700*580	φ700*580	φ750*650
8	烘干机滚筒容积 Dryer drum volume	L	185	223	223	287
9	烘干机电机功率 Dryer motor power	Kw	0.12	0.12	0.12	0.12
10	风机功率 Fan power	Kw	0.75	0.75	0.75	0.75
11	加热功率 heating power	Kw	12	13.5	15	16.5
12	外形尺寸 Dimensions	mm	910*1210*2040	910*1210*2040	910*1210*2040	940*1260*2140
13	整机重量 Weight	KG	600	640	783	1100

HG系列干衣机
HG SERIES CLOTHES DRYER

Fully automatic computer control the temperature, temperature control devices, over-temperature protection device.
全自动电脑控制系统，可以控制温度和运转时间，并且具有超载保护器。

序号	型号 model	单位	HG-15	HG-20	HG-25	HG-35	HG-50	HG-70	HG-100	HG-120	HG-150
1	烘干容量 capacity	KG	15	20	25	35	50	70	100	120	150
2	滚筒尺寸 Drum Dimension	mm	φ750*670	φ890*620	φ970*640	φ970*890	φ1170*865	φ1170*1125	φ1450*1180	φ1450*1180	1600*1350
3	滚筒容积 Drum volume	L	296	386	473	658	930	1210	1949	1949	2714
4	电机功率 Motor Power	Kw	0.55	0.55	0.75	0.75	1.1	1.1	2.2	2.2	3
5	风机功率 Fan power	Kw	0.55	0.55	0.75	0.75	1.1	1.5	1.5*2	1.5*2	1.5
6	加热功率 Electric heating power	Kw	15	19.8	24	33	46	53	66		
7	蒸汽压力 steam pressure	Mpa	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5	0.4~0.5
8	额定电压 voltage	V	220/380	380	380	380	380	380	380	380	380
9	外形尺寸 Dimensions	mm	840*1200*1560	1000*1200*1680	1060*1270*1860	1060*1570*1800	1300*1570*2180	1310*1830*2170	1570*2040*2240	1630*1980*2440	1810*2530*2500
10	整机重量 Weight	KG	330	350	400	450	510	580	780	880	1000

Heating: electrical,gas,steam, electrical and steam, coal. Operator could choose.
加热方式：电热、天然气、蒸汽、燃煤，使用方可以自主选择。
Optimal design of cooling fan, with the best heat dissipation, wind speed.
冷却风扇的优化设计，及时、快速的冷却滚筒内衣物，缩短冷却时间。

Drums are all in stainless steel, panels are in stainless steel or spray material, prevent the pollution of corrosion to fabric.
滚筒采用优质不锈钢，面板为不锈钢或喷塑材质，有效阻止对衣物的污染。

Large door, easy loading and unloading, opens 180°, option: left or right opening.
大直径装衣门，装取衣物方便，门可以被 180°打开。使用方可根据自身情况选择左侧或右侧开门。

Easy accessibility to the vital parts, easy service, quick replacement of the belt.
采用三角皮带传动，结构简单，主要部件维护、保养非常方便。

YP系列烫平机(1-6辊筒)
YP SERIES 1 ROLLER,2&3&4&5&6 ROLLERS IRONING MACHINE

序号	型号 model	单位	YP-8016	YP-8020	YP-8030	YP-8033	YP2-8025	YP2-8030	YP3-8030	YP4-8033
1	辊筒直径 Roller diameter	mm	800	800	800	800	800	800	800	800
2	最大熨平宽度 Max ironing width	mm	1600	2000	3000	3300	2500	3000	3000	3300
3	熨平速度 Ironing speed	m/min	0~6	0~6	0~6	0~6	3~15	3~15	5~22	8~30
4	最高熨烫温度（电/蒸汽） Max Iron Smooth Temperature	℃	0~180	0~180	0~180	0~180	0~180	0~180	0~180	0~180
5	蒸汽压力 steam pressure	Mpa	<4	<4	<4	<4	<4	<4	<4	<4
6	电机功率 Motor Power	Kw	0.75	0.75	0.75	0.75	1.5	1.5	2.2	2.2
7	变频器功率 Inverter power	Kw	1.5	1.5	1.5	1.5	2.2	2.2	2.2	3.7
8	额定电压 voltage	V	220/380	220/380	220/380	220/380	220/380	220/380	380	380
9	外形尺寸 Dimensions	mm (宽长高)	2760*1470*1500	3110*1450*1400	4150*1500*1300	4450*1500*1300	3650*2450*1300	4150*2450*1300	4150*3400*1300	4350*4150*1300
10	整机重量 Weight	KG	1000	1000	1000	1000	2000	2000	3000	4000

For bedsheets, quilts, tablecloth, towel, curtain, bath towel etc..
本机器广泛使用于床单、被罩、台布、毛巾、窗帘、浴巾等大面积布草的整烫。

Flatwork ironing machine available models alot
烫平机有更多规格可选

Variable frequency, variable speed according to fabric, temperature, moisture, steam supply, etc.
采用变频调速系统，可以根据织物特点、温度、湿度、蒸汽供应情况来调节机器的运转速度。
Frame and auxiliary,high-quality steel carbon structures, strong and durable.
整机框架结构、辅轴采用高强度碳钢，坚固耐用。

Three-phase electrical system, overload protection, voltage and short circuit protection, emergency stop switch.
三相动力电力系统，具有过载保护功能，超压和短路保护，紧急制动按钮，多重保护系统。
The fence and travel switch in the input part, reduce fatigue, misuse and the risk.
机器正面的防护栏和形成开关系统，能有效减少因疲劳、误操作等引起的危险。

Pressure roll with guiding ribbons,superior ironing quality,nomex ironing belts.
压力辊筒在丝带的指引下，熨烫质量优越，无熨痕。

Sealed rotary joints, prevent leakage, safety and reliability, save energy.
旋转接头密封，防止泄露，安全可靠，节约能源。
Stainless steel roller, large diameter(Φ800mm or Φ600mm), surface is smooth.
不锈钢辊筒，大直径(直径 800mm 或者 600mm)，表面光滑。

Simple control by Start/Stop button.
操作简单，只需要通过"开始 / 停止"按钮。

GTP系列高速烫平机
High speed ironing machine

1.The material of the roller is stainless steel structure, and each transmission shaft is made of high-precision special steel pipe, which effectively guarantees the quality of the ironing of the bed sheet cover and the iron belt.
2. The effective wrap angle of the bed sheet is 300 ° , which increases the heating area, improves the ironing speed, makes full use of the heat energy, and reduces the cost of use.
3. Frequency conversion speed regulation, integrated chain transmission design, simple structure, stable transmission, low failure rate, and convenient maintenance.
4. The combined multi-roller design is convenient for users to upgrade to three, four, five, and six rolls with the increase of output. There is no need to eliminate or add equipment, which effectively reduces user operating costs.
5. Adopt tensioning wheel design, which can automatically adjust the tightness of the ironing belt according to the thickness and thickness of the bed sheet, thus ensuring the quality of ironing.
6. The internal drainage design of Japan-made steam trap and patented drying cylinder effectively guarantees the surface temperature of the drying cylinder, improves the ironing efficiency, and reduces the cost of use.
7. The boxes on both sides of the machine are processed by imported CNC laser, which ensures the parallelism of all the cloth guide rollers and makes the equipment run more smoothly.
8. There are three models to choose from: steam heating, electric heating, and thermal oil heating.

1. 滚筒材质为不锈钢结构，各传动轴采用高精度特殊钢管精加工而成，有效的保证了床单被套熨平质量和烫带的不偏不跑。
2. 床单有效包角为 300°，提高了加热面积，提升了熨平速度，充分利用了热能，降低了使用成本。
3. 变频调速、一体式链条传动设计，结构简单、传动平稳、故障率低，维护方便。
4. 组合式多辊设计，方便用户随产量增加而升级为：三、四、五，六辊，无需淘汰或增加设备，有效降低了用户运营成本。
5. 采用涨紧轮设计，可随床单被套忽厚忽薄自动调节烫带松紧，从而保证熨烫质量。
6. 日本原产疏水阀、专利烘筒内部排水设计，有效保证了烘筒表面的温度，提高了熨烫效率，降低了使用成本。
7. 机器两边箱体采用进口数控激光加工，保证了所有导布滚的平行度，使设备运行更加平稳。
8. 有蒸汽加热、电加热、导热油加热三种机型可供选择。

Model	型号	单位	GTP-3300
Power	总电源	v	380(3p)
Motor Power	电机功率	kw	5.3
Compressed air pressure	压缩空气压力	MPa	0.6
Compressed air consumption	压缩空气消耗量	L/h	20
Steam pressure	蒸汽压力	MPa	Max.1.0
Steam ratio	蒸汽耗量	Kg/h	340
Roller dia	辊筒直径	mm	705
Max ironing width	最大熨平宽度	mm	3300
Ironing speed	熨平速度	m/min	3-50
Dimensions	外形尺寸	mm	4640*3150*1600
Weight	整机重量	kg	11500

ZD系列折叠机
ZD SERIES FOLDING MACHINE

1.Double times horizontal and three longitudinal, the biggest fold function scope is 3300mm.
2.PLC programmable controller with superior, anti-jamming capability.
3.Perfect the diagnosis function and safety protection system for daily use.
1. 两横三纵五折，最大的折叠宽度为 3300 毫米。
2.PLC 可编程序控制器，较强的抗干扰能力。
3. 完善诊断功能和安全保护系统。

Model型号		ZD3000-V	ZD3300-V
Max Folding LxW最大折叠长宽	mm	3000x3000	3300x3000
Max Speed最大转速	m/min	10-50	10-50
Layers折叠次数	layer	5	5
Rated Input Power额定输入功率	kw	1.3	1.3
Dimension外形尺寸	mm	4120x2800x1760	4320x2800x1760
Weight重量	kg	1600	1800

GZD-3300-V高速折叠机（自带堆码）
HIGH-SPEED SHEET FOLDER(WITH STACKER)

1. Implement high-speed folding at the rate of up to 60 m/min.
2. More efficient horizontal folding makes two folds with one action.
3. Implement six-fold [3 horizontal plus 3 vertical] for bed sheet.
4. Folding all with knife except for pre-fold, reducing the influence from hard linen.
5. Stacking unit relieves workers fatigue.
6. Horizontal folding uses double optical meshes, with less faulty action coming from damaged linen.
7. The shaft is made of a precise stainless steel composite tube, with less shaft jitter, preciser mechanical movement, and longer lifetime of bearing.
8. Operating system has the self diagnosis function, accurately locating any fault, troubleshooting, and less maintenance period

1. 可以实现高速折叠，最高折叠速度能达到 60m/min。
2. 横折实现了 1 刀 2 折的效果，提高了折叠的速度。
3. 可以实现床单的六折折法（横折 3 折 + 纵折 3 折）。
4. 除预折外全部采用刀折，减少了布草的硬度对折叠效果的影响。
5. 自带堆码机构，减轻了工人的劳动强度。
6. 横折采用双光眼设计，减少因为布草损坏时带来的误动作。
7. 轴体都采用精密不锈钢复合管制造而成，减少了轴体的跳动，提高了机械运动的精度，延长了轴承寿命。
8. 操作系统的故障自诊断功能，能准确定位故障发生部位和故障原因并提出解除方法，减少了维护时间。

主要技术参数 /Technical Parameter

型号			Model	GZD- 3000V-B	GZD-3300V-B
项目			Items	3000 series	3300 series
折叠能力 Folding capacity	最大折叠宽度[选择单通道时][mm]		Max folding width Single channel [mm]	1100-3000	1100-3300
	输送带的速度[m/min]		Conveying rate [m/min]	10-60	
电动机 Motor	横向折叠机 Horizontal folder	主传动装置	Primary transmission	1.5kWxl	
		预折传动装置	Pre- fold transmission	0.4kWxl	
	纵向折叠机 Vertical folder	上平台传动装置	Upper transmission	0.4kWx1	
		纵一辊系传动装置	Vertical roller 1 transmission	0.4kWxl	
		纵二辊系传动装置	Vertical roller 2 transmission	0.55kWx1	
		下平台传动装置	Lower transmission	0.75kWxl	
	堆码机 Stacker	堆码机传动装置	Stacking transmission	0.4kWxl	
		堆码机排出传动装置	Stacking output transmission	0.12kWxl	
空气压力 Air pressure	空气压力[MPa]		Air pressure (MPa)	0.5[务必提供稳定压力压缩空气] [Steady compressed air is a must]	
	空气消耗量[L/min]		Air consumption [L/min)	240	
电源 Power supply	电源电压[V]		Voltage (V]	3相AC380 3-phase AC380	
	电源容量[kW]		Capacity (kW]	4.52kW	
设备外形[mm]			Outline (mm]	5100*3200*1800	
设备重量			Weight	2700 kg	

ZD毛巾折叠系列
ZD Series Towel Folding Machine

1.Auto control with big LED screen and multi-language interface.
2.The length of towels can be measured with the coder on the revolving shaft and the folding mode can be automatically decided. The first cross fold is done via running in both directions and blowing system.
3.The structure innovatively designed is adaptable to different thickness of towels and ensure good result of folding and enter the second fold smoothly.
4.Output postioned accurately. Auto counter for stacking. Fast respond. Short work cycle.
5.Conbined with international advanced techology on the fields fo computer, communication and controlling, the multi-intelligent controlling system is designed specially for TOWEL folding, which can be surveilled and controlled via net, and has the functions of character istic embedded software and comprehensive intelligent surveillance.
6.Programmable. Auto and manual modes available.

1. 自动控制的大的 LED 屏幕，有多种语言。
2. 根据转轴上的编码器测量毛巾长度并选择折叠方式。第一横折经由在两个方向运行并吹制完成的。
3. 顺利进入第二折叠。结构设计新颖，可适应不同厚度的毛巾，折叠效果好。
4. 输出位置准确。堆叠自动折叠计数。折叠周期短，可快速完成。
5. 结合电脑领域的国际先进技术，为毛巾折叠机特别设计的多智能控制系统和通信控制系统，可以通过网监控的，并具有数字嵌入式软件和全面的智能监控。
6. 多程序可选择。有自动和手动两种模式。

型号	Model		ZDMJ-D
折叠之前最大尺寸	Max size before folding	mm	1200x1920
折叠后的最大尺寸	Max size after folding	mm	600x650
耗气量	Air consumption	L/min	200
压缩空气连接直径	Compressed air connection dia	mm	Φ12
电机额定功率	Rated motor power	KW	3
耗电量	Power consumption	KW.h/h	2
周期	Cycle time	second	3-7
容量	Capacity	pcs/h	800-1200
空气压力	Air Pressure	mpa	0.5-0.7
尺寸	Dimension	mm	2102x1305x5159
总重量	Total Weight	kg	1200

GSB送布机系列
GSB SERIES FEEDING MACHINE

1.The conveyor belt adopts a perforated type, which greatly improves the absorption of linen on the conveyor belt, making the linen more smooth and strong.
2.Push-pull fan windows and doors are used outside the fan to facilitate cleaning and maintenance of debris absorbed in the fan.
3.The feeding speed can be adjusted to perfectly match the ironing speed.
4.Efficient suction function can make the tail of the linen completely shake to meet the needs of different customers.
1. 传送带采用带孔式，大大提高了布草在传输带上的吸附力，使得布草更加平整且吸附性强的传送。
2. 风机外采用的是推拉式风机窗门，方便清理风机内吸附的杂物和维护。
3. 送布速度可调节，与熨平速度完美匹配。
4. 高效的吸风功能，可使布草尾段完全抖开，满足不同客户的需求。

序号	model	型号	单位	GSB3300
1	Max feeding width	最大送布宽度	mm	3300
2	Fan power	风机功率	Kw	0.75*4
3	Transmission power	传动功率	Kw	0.75
4	Feeding power	送布功率	Kw	0.37
5	air pressure	空气压力	Mpa	0.4~0.5
6	voltage	额定电压	V	380
7	Dimensions	外形尺寸	mm	4520*1260*1400
8	Weight	整机重量	KG	900

ZB系列展布机
ZB spreading machine

1.O According to the different options configuration, all compatible with all kinds of cloth, including bed sheets, quilt cover, tablecloths and small pieces of linen fast and smooth delivery.
2.O According to the type of linen, delivery cloth can handle up to 1000 pieces of linen per hour, to achieve high production capacity.
3.O The main drive, electronic control, pneumatic components are used in Europe and the United States and Japan brand, to ensure reliability.
4.O Chinese PLC large LCD screen control interface, with ironing machine and folding machine linkage control, adjust the program convenient and quick;
5.O Option: 3 station or 4 station, bypass mode.
1. 根据不同的选项配置，全部兼容处理各类布草，包括床单类，被套类，桌布类及小件布草的快速握平和送布。
2. 根据布草的类型，送布每小时最大可处理 1000 件布草，达到极高的产能。
3. 主要传动，电控，气动部件均采用欧美及日本品牌，保证可靠性。
4. 中文 PLC 大液晶屏控制界面，可与烫平机和折叠机联动控制，调整程序方便快捷；
5. 可选项：3 工位或者 4 工位，旁通模式。

Model	型号		ZB-3300
The Max Width of Linen	最大布草宽度	mm	3300
Station Number	工位数		3
Working Speed	运行速度	m/min	5~40
Nominal Voltage	额定电压	v/hz	AC380/50
Motor Power	电机功率	kw	8.2
Minimum Air Inlet Pressure	最低进气压力	Mpa	6.5
Air Consumption	耗气量	m^3/min	40
Size(L×W×H)	外形尺寸	mm	4745×2835×2750
Total Weight	整机重量	kg	3750

GRE地毯清洗机系列
Carpet Washing Machine

Carpet cleaning machine has the following several work process:
1.put the carpet on the carpet washing machine, then put the button of open.
2.automatic extraction of peristaltic pump from detergent container carpet detergent, spray on the carpet surface, nozzle height and position can be adjusted freely, can adapt to all kinds of thickness and the size of the carpet cleaning
3.when the carpet to the rotation of cleaning brush to start washing, use brush can be set according to the carpet width, brush rotation direction can be set freely, so that we can make the motor to extend the service life and prevent deformation of brush line
4.carpet cleaning, after the completion of the flushing stage, rinse after automatic winding, and then on the carpet in the dryer to dehydration.Washing process and easy operation, no special training.
地毯清洗机的以下几个工作流程:
1. 把地毯放在地毯清洗机上,然后按开始按钮。
2. 用软管泵自动从地毯洗涤剂容器提取溶剂，喷在地毯表面，喷嘴高度和位置可自由调节,能够适应各种厚度的大小的地毯清洗。
3. 转动地毯清洁刷,开始洗涤。可根据地毯宽度设置刷子,刷子的旋转方向可以自由设定,延长电机的使用寿命和并防止刷子变型
4. 刷完之后清洗地毯。刷完之后，自动转动进行冲洗，然后在地毯烘干机里脱水。地毯清洗过程操作简单,不需要特别培训。

型号	Model		CRE-1600	CRE-2000	CRE-2500	CRE-3200	CRE-4000
刷子的数目	Brush the number		5	5	6	6	10
洗涤最大宽度	Maximum width of washing	m	1.6	2	3	3	4
工作效率	work efficiency	m^2/h	40	50	55	90	120
平均洗涤时间	The average washing time	/min	5	5	5	5	5
耗水量	Water consumption	Kg/m^2	30	30	30	30	30
耗电量	Power consumption	Kg/m^2	0.075	0.075	0.075	0.075	0.075
额定功率	Rated power	Kw	3	3.5	3.5	3.5	7.5
刷机速度	Brush speed	rpm	0-500	0-500	0-500	0-500	0-500
蠕动泵的数目	Number of peristaltic pump		1	1	1	1	1
水泵的数	Number of water pump		1	1	1	1	1
贮水箱	Water storage box		1	1	1	1	1
触摸面板	The touch panel		1	1	1	1	1
进水管	Inlet pipe	mm	1/2"	1/2"	1/2"	1/2"	1/2"
自动音量	Automatic volume		1	1	1.00	1.00	1.00
速度	Speed	m/min	0.6	0.6m/min	0.6m/min	0.6m/min	0.6m/min
电压	voltage	v			380		
尺寸	Size	m	2.2x2x1.8	3x2x1.8	3.5x2x1.8	4.6x2x1.8	5.4x2x1.8
重量kg	Weight	kg	520	600	720	1000	1200

GXQ系列四氯乙烯全自动全封闭干洗机
GXQ SERIES PERC DRY CLEANER

1.Capacity from 6kg to 20kg, fully auto, fully enclosed.
2.High quality recycle cooling system, efficient recovery of solvents.
3.The centrifugal filter remove impurities, particles, pigment, ensure clean solvent, avoid dyeing, blockage.
4.Safety door interlock system,protect operator.
1. 6 公斤—20 公斤，全自动，全封闭。
2. 高质量的循环冷却系统、高效回收的溶剂。
3. 离心过滤去除杂质，粒子、颜料、保证干净的溶剂，避免染色、堵塞。
4. 安全门锁系统、保护操作员。

Model型号		GXQ-6	GXQ-8	GXQ-10	GXQ-12	GXQ-16	GXQ-20
Capacity容量	kg	6	8	10	12	16	20
Drum volume滚筒容积	l	108	137	174	182	312	313
Washing speed洗涤速度	r/min	34	34	34	34	34	32
Middle Spin speed中脱速度	r/min	370	370	370	370	370	450
Hydraulic sump Power液压泵功率	kw	0.75	0.75	0.75	0.75	1.5	0.75
Washing power洗涤功率	kw	0.3	0.4	0.4	0.4	0.75	1.5
High spin power高脱功率	kw	1.3	1.5	1.5	1.5	2.2	4
Filter power过滤器功率	kw	0.55	0.55	0.55	0.55	0.55	1.75
Dimension外型尺寸	L(mm)	1220	1480	1540	1520	2070	2160
	W(mm)	1230	1280	1450	1360	1440	1530
	H(mm)	1700	2050	2040	2110	2250	2040
Net Weight重量	kg	650	700	800	950	1200	2240

GX系列干洗机
GX SERIES PERC DRY CLEANER

1.It can wash, spin and dry, full function, operate easily.
2.Three bottom tanks, distillation tank, distillation condenser, water separator, nylon filters, etc., protect the machine and save solvent.
3.Capacity from 6kg to 16kg, semi auto, semi enclosed.
1. 洗脱干，功能齐全，操作简便。
2. 三个底部蒸馏罐、蒸馏冷凝器、水分离器、尼龙过滤器等，保护机器和节省溶剂。
3.6 公斤—16 公斤，半自动，半密封的。

Model型号		GX-6	GX-8	GX-10	GX-12
Capacity容量	kg	6	8	10	12
Drum volume滚筒容积	mm	∅635x300	∅730x360	∅730x440	∅730x520
Washing speed洗涤速度	r/min	35	35	35	40
Middle Spin speed中脱速度	r/min	428	428	428	450
Hydraulic sump Power液压泵功率	kw	0.55	0.55	0.55	0.75
Motor Power电机功率	kw	1.5	1.5	1.5	2.2
Fan power风机功率	kw	0.55	0.55	0.55	0.75
Filter power过滤器功率	kw	0.55	0.55	0.55	0.55
Dimension外型尺寸	mm	1400x910x1730	1560x1250x1930	1740x1330x2030	1750x1350x1850
Net Weight重量	kg	700	1000	1200	1350

SGXH系列石油全自动全封闭干洗机
Hydrocarbon drycleaner (fully automatic, fully enclosed)

1.Electrical materials, electrical appliances, main motor, pneumatic valves, transmission parts and refrigeration systems, some of the major parts are used the world famous high quality parts.
2.Stainless steel production, from Europe structural design, compact structure, sophisticated technology, fashion and generous, with imports of advanced automotive coatings surface coating, so that machine highlights in unusual elegance.
3.This machine is fully closed fully automatic type dry washing machine, it have compressed cooling system and recycle filtering working system, save solvent (hydrocarbon), no pollution to the air, no harm to the users.
1. 电材料，电器，主电机，气动阀门，传动部件和制冷系统，以及一些主要部件均采用世界著名的高品质零件。
2. 由不锈钢制作，欧式设计，结构紧凑，精湛的生产工艺，时尚大方，具有先进进口的汽车涂料表面喷涂，使机器独特优雅漂亮。
3. 本机是全封闭全自动干洗机，它有压缩冷凝系统和循环过滤系统，节省溶剂(四氯乙烯)，不污染空气，不伤害用户。

型号	Model		SGXH-8	SGXH-10	SGXH-12	SGXH-15
洗涤容量	Washing Capacity	kg	8	10	12	15
滚筒的容量	Capacity of drum	L	137	174	182	220
干洗速度	Washing Speed	r/min	36	36	36	36
脱液速度	Extracting Speed	r/min	1000	900	800	700
液泵电源	Liquid Pump Power	kw	0.55	0.55	0.55	0.55
滚筒电气工程(低速)	Roller electrical engineering(L .ow speed)	kw	0.4	0.4	0.4	0.4
滚筒电气工程(高速)	Roller electrical engineering(high speed)	kw	1.5	1.5	1.5	1.5
过滤器	Filter electrical engineering	kw	0.55	0.55	0.55	0.55
电源	Power Supply	v	220/380	220/380	220/380	220/380
频率	Frequency	Hz	50	50	50	50
外形尺寸(L. W. H)	Dimension(L.W.H)	mm	1750x1200x1750	1750x1200x1800	1750x1200x2050	1750x1200x2150
总重量	Total Weight	kg	800	900	1000	1200

SGX系列石油干洗机
SGX SERIES HYDROCARBON DRY CLEANER

1.Be designed for hydrocarbon dry cleaner.
2.Steam or electric heated.
3.Capacity from 8kg to 15kg, operate easily.
1. 石油干洗机。
2. 蒸汽或电加热。
3.8 公斤 -15 公斤，操作简单方便。

model	型号	单位	SGX-12	SGX-15
capacity	额定洗衣量	kg	12	15
Drum volume	液体存储容量	L	230	250
Roller size	滚筒尺寸	mm	630*400	700*400
voltage	额定电压	V	220	220
Motor Power	电机功率	kw	1.8	1.8
Hydraulic Pump Power	液泵额定功率	kw	2*0.37	2*0.37
Power	总功率	kw	2.5	2.5
Dimensions	外型尺寸	mm	1730*920*1580	1730*1000*1580
Weight	整机重量	kg	480	500

WJT系列万用夹烫机
WJT Series Universal Laundry Press Machine

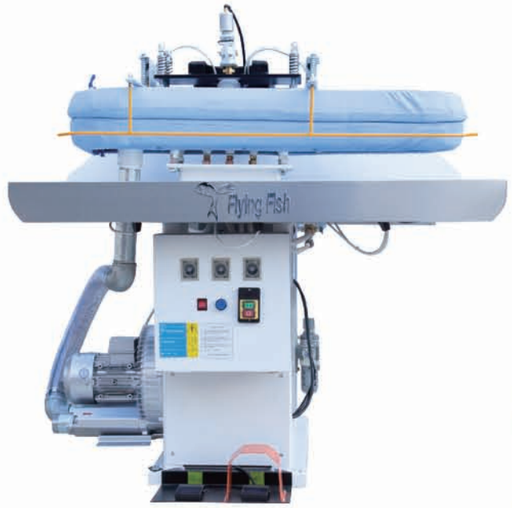

1. Available to press any special parts of cloth.
2. With strong vacuum moisture removing system.
3. Can press cloth dehydrated.
4. Using high-quality pneumatic components and with reasonable designed steam circuit. Controlled by compressed air.
5. Steam circuit is very simple and efficient. Temperature rises fast and with low heat ullage.
1. 可以夹烫服装多个部位。
2. 强力抽湿系统。
3. 可以夹烫经过脱水的服装。
4. 使用优质气动元件，合理的蒸汽管路结构，空压机控制操作。
5. 蒸汽管路简单，效率高，升温快，能耗低。

型号	Model		WJT-125	WJT-126	WJT-128	WJT-129
			dry clean	w ashing	Auto/wet clean	Auto/dry clean
所需的蒸汽压力	Required Steam pressure	kg/cm^2	4-5	4-5	4-5	4-5
蒸汽压力	Steam Pressure	mpa	0.4-0.5	0.4-0.5	0.4-0.5	0.4-0.5
耗蒸汽量	Steam Consumption	kg/h	15	15	15	15
所需的真空	Required Vacuum	m^3/min	2.5	2.5	2.5	2.5
尺寸	Occupied Area	mm	1200x1280x1300	1200x1280x1300	1200x1170x1300	1200x1170x1300
总重量	Total Weight	kg	320	320	320	330

CCPM系列领袖夹烫机
CCPM Series Shirt Collar and Cuff Pressing Machine

1.With simple and reliable design, the pressure of the machine can be adjusted sleeplessly, and which is equipped with a programmable computer system to set the pressing time, suction time, etc. to meet the requirement of different kinds of fabrics.
2.The buck shape is with the smooth and durable surface, the shape is specially designed for collar and cuff pressing of shirt.
1. 简单、合理的设计结构，蒸汽压力可以通过电脑程序系统自由调节，还可以设定夹烫的时间，吸湿的时间等，来满足不同织物的需要。
2. 光滑、耐磨的拱形表面，是专门为熨烫衬衫的领口、袖口设计的。

SBP系列服装肩背夹烫机
SBP Series Automatic Shoulder-Back Garment Presser

1.High-quality components and with reasonable designed steam circuit.
2.With 6mm polished stainless steel plate and reasonable steam pressure,it can make sure of high-quality press and perfect goodness of it.
3.Temperature rises fast with low heat ullage.
4.It is stable,reliable, safe, simple and efficient.
1. 采用优质气动元件及合理的气路设计。
2.6mm 抛光工作面，气压结构合理，压烫吻合度好，保证熨烫效果。
3. 温度上升速度快，热损耗低。
4. 稳定、可靠、安全、简单和有效。

PP系列自动夹裤机
PP Series Automatic Pants Presser

1. Set parameters according to the need, to meet different process requirements.
2. Forced two-cylinder, double than the regular press pressure.
3. Electric heater built-in, especially for iron processing.
4. For pants topper.
1. 根据需要设定参数，来满足不同程序的要求。
2. 强力的双缸结构，比常规的夹烫压力更大。
3. 内置电加热器。
4. 适用于裤子的顶部熨烫。

DGN系列多功能熨烫台
DGN Series Multi-function ironing table

1.It can used as a spotting table with jet gun.
2.It has strong absorption, dehumidity fast.
1. 喷汽枪使本机可以作为去渍台使用。
2. 强大的吸力，吸湿效果好。
3. It has good performance when it was used for wool ,silk, fluff, because it can blow out wind for ironing. It is good at ironing skirt.
4. It has a pedal swith, round head and light, conveniently for operation.
5. Taking water, a moisture, cooling stereotypes of the function.
3. 熨烫羊毛、丝绸有非常好的效果，因为具有吹风熨烫效果，更适合于熨烫裙子。
4. 具有踏板、圆模头和灯，操作方便。
5. 集进水、吸湿、冷却定型功能为一体的机器

SBP系列衬衫夹烫机
SBP Series Shirt Body Pressing Machine

1. The front chest position of garment in the corners of the buck is to improve the finish in the underarms and shoulder areas.
2. The highly polished stainless steel head transfers head evenly to provide a professional finish every time.
3. The size of head is suitable for most of garments.
4. The machine frame is designed elegant and tightened.
1. 能有效改善服装前襟部位的熨烫效果。
2. 高度抛光不锈钢工作面，平衡移动，确保每一次熨烫效果。
3. 烫板的尺寸适用于大多数的服装。
4. 机器结构优雅而紧凑。

DBP系列服装肩背夹烫机器
DBP Series Shirt、Collar & Sleeves Integrated Pressing Machine

1.Shoulder Press: Specifically designed to provide the best possible press in that hard to finish area.
2.Multilingual Display Board: User friendly feature utilizing four languages such as English, French, Korean & Spanish.
3.Steam Injection – A new steam injection system covers the entire body width and with a new heated buck body, processing time is reduced.
4.Tensioning Tuck Press: A new lower tuck clamp has been installed along with a tensioning function improving the tuck finish quality.
5.Side Expanders: Improved side expanders open early to eliminate wrinkles.
1. 肩部夹烫：独特设计，方便夹烫某些难以夹烫地方。
2. 多语言显示屏：方便客户随意选取四种语言，如英语，法语，韩语和西班牙语。
3. 喷射蒸汽：整个机身由一个一个新的蒸汽喷射系统覆盖，并用新的加热体降压，来减少工作时间。
4. 卷边收紧夹烫：安装新的卷边夹钳来提高褶皱夹烫功能，达到良好效果。
5. 侧边扩展器：改进的侧边扩展，以消除褶皱。

型号	Model		DBP-190
所需的蒸汽压力	Required Steam pressure	kg/cm^2	4-5
耗蒸汽量	Steam Consumption	kg/h	30-35
压缩空气压力	Compressed air pressure	mpa	0.4-0.5
电机功率	Moto Power	kw	4.0
尺寸大小	Occupied Area	mm	1800x1000x2000
总重量	Total Weight	kg	2,000

ZPT系列自动人像机
ZPT Series Automatic Dummy Machine

Suitable for laundry, hotels and dyeing shops for fine pressing superb garments such as suits, wool uniforms etc.
适合洗衣房、酒店、染色坊对一些套装，制服的熨烫。

XTT系列烫台
XTT Series Ironing Table

1.Strong absorbability, dehumidity, the effect of finalize design is good.
2.It is suitable for most kinds of fabrics and semi finished products.
3.It has a pedal swith and round head, conveniently for operation.
1. 强烈的吸附性能、吸湿效果好。
2. 适用于多种面料和半制成品。
3. 一个踏板开关和一个圆头，方便作业。

BP系列吹裤机
BP Series Pants Blowing Machine

1. With steam and air workstations.
2.Waistband expansion device, the tension can be adjusted and maintained, regardless of the size of pants.
3.Legs down device, with dual adjustment, for both long and short pants.
4.Breast have a fixed waistband device.
5.Two motor, strong wind and hot air.
1. 一个带蒸汽和吹风的工作站。
2. 裤腰扩张装置，张力可以调节和维持不变，不管裤子的尺码大小。
3. 裤腿下拉装置，带双重调节，既能烫长裤，又能烫短裤。
4. 裤腰前襟有固定装置。
5. 通过两个马力的强力鼓风机吹热风。

BZ系列衣服包装机
BZ Series Clothes Packing Machine

XD系列消毒柜
XD Series Disinfect Cabinet

ZDF系列蒸汽发生器
ZDF Series Steam Generator

SS系列衣服输送线
SS Series Clothes Conveying Machine

QZ系列去渍台
QZ Series Spotting Table

熨斗
Ironer

手推车
Laundry Trolley

换币器
Coin Changer