VR

Technical Data		Unit	WT1100
A	Overall Operating Height	mm	4086
B	Height to Bucket Hinge Pin	mm	3150
C	Height to Top of Cab	mm	2028
D	Height to Bottom of Level Bucket	mm	2960
E	Overall Length without Bucket	mm	2833
F	Overall Length with Bucket	mm	3623
G	Dumping Angle at Maximum Height		40°
H	Dumping Height	mm	2465
I	Dumping Reach	mm	610
J	Rollback of Bucket on Ground		30°
K	Rollback of Bucket at Full Height		94.6°

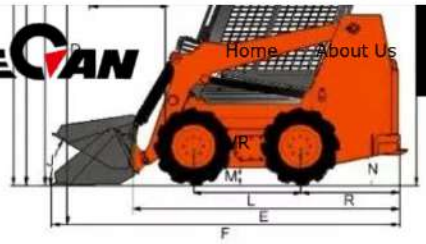

Main Configurations:

CHINA III QUANCHAI HIGH PRESSURE COMMON RAIL ENGINE 65KW, rated capacity 1100kgs
AMERICA SAUER PUMP
POCLAIN HYDRAULIC MOTOR MCR5 WITH PARKING BRAKE
ITALY CONTROL VALVE WITH SAFTY LOCK
CHINA 3 STAGE AIR FILTER
AMERICA BEARING
CLOSED CAB WITH HEATER, FAN,WARING LIGHT
MIRROR OUTSIDE CAB
FRONT & REAR TURNING LIGHT、REAR WIDTH LIGHT
REVERSE BUZZER
12—16.5
TUBELESS TIRE 12-16.5
KEY STOP ENGINE
HYDRAULIC JOYSTICK CONTROL
SPECIAL BIG ALUMINIUM RADIATOR